


# Product data sheet

## Characteristics

# 33663

MX shunt release, ComPact NS630b to NS3200 fixed, MasterPact NT/NW, rated voltage 277 VAC 50/60 Hz

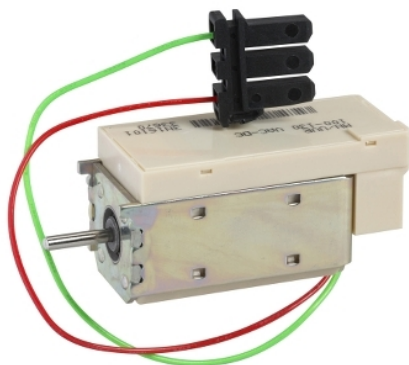

### Main

Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT Masterpact NW ComPact NS630b...1600 ComPact NS1600b...3200
Voltage release type	Shunt trip release
[Uc] control circuit voltage	277 V AC 50/60 Hz

### Complementary

Threshold tripping voltage	0.7...1.1 x Un
Supply holding power	4.5 VA
Mounting mode	Fixed
Response time	50 ms (Compact NS630b...1600) 50 ms (Compact NS1600b...3200) 55 ms (Masterpact NT) 70 ms (Masterpact NW)
Accessory / separate part category	Spare parts for Masterpact NT Spare parts for Masterpact NW Spare parts for Compact NS1600b...3200 Spare parts for Compact NS630b...1600

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	152 g
Package 1 Height	3.5 cm
Package 1 width	6 cm
Package 1 Length	8.2 cm

### Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

### Contractual warranty

Warranty	18 months
----------	-----------