

Main

Product or component type	Sinus filter
Range compatibility	Altivar 61Q Altivar 71Q Altivar 61 Altivar Process ATV900 Altivar 71 Altivar Process ATV600
Product specific application	Output filter
[In] rated current	400 A
Thermal losses	1900 W at 100 Hz
Product compatibility	ATV61HC22N4 ATV61QC20N4 ATV61QC25N4 ATV71HC20N4 ATV71HC25N4 ATV71QC20N4 ATV71QC25N4 ATV630 variable speed drive wall mount - 220 kW, 380...480 V ATV930 variable speed drive wall mount - 220 kW, 380...480 V
Switching frequency	4...8 kHz
Maximum output frequency	100 Hz
Maximum permissible voltage	500 V AC

Complementary

Electrical connection	Bare wires diameter: 11 mm
Maximum voltage drop at rated load	10 %
Max current	1.5 x nominal current (duration = 60 s)
Net weight	190 kg

Environment

IP degree of protection	IP00
Environmental characteristic	3B1 conforming to IEC 721-3-3 3C2 conforming to IEC 721-3-3 3S1 conforming to IEC 721-3-3
Pollution degree	2 conforming to EN 50178
Vibration resistance	1 gn (f= 13...200 Hz) conforming to IEC 60068-2 1.5 mm peak to peak (f= 3...13 Hz) conforming to IEC 60068-2
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative humidity	0...95 %
Ambient air temperature for operation	40...50 °C (with current derating 1.5 % per °C) -10...40 °C (without current derating)
Ambient air temperature for storage	-40...65 °C
Operating altitude	<= 1000 m without current derating 1000...3000 m with current derating 1 % per 100 m

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Package 1 Weight	168.500 kg
Package 1 Height	8.000 dm
Package 1 width	3.900 dm
Package 1 Length	5.900 dm


Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

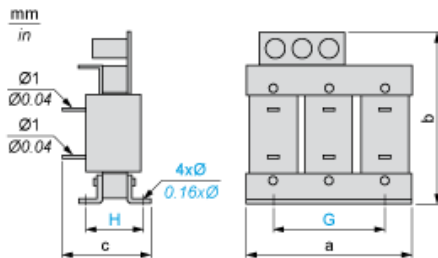

Dimensions in mm

a	b	c	G	H	Ø	Ø1
480	600	340	430	238	13 x 18	11

Dimensions in in.

a	b	c	G	H	Ø	Ø1
18.90	23.62	13.38	16.93	9.37	0.51 x 0.71	0.43

Mounting Recommendations

