


Product data sheet

Characteristics

SZMK208Z00

Complete field for 4 meter devices, Prisma XS,
pre-mounted on uprights, (W) 500 mm x (H)
1200 mm

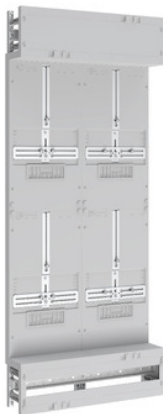

Main

Range	Prisma
Product or component type	Installation kit
Accessory / separate part category	Installation accessory
Range compatibility	Prisma Prisma XS

Complementary

Enclosure/cubicle description	Enclosure depth 210.0 mm
Provided equipment	4 x metering plate 2 x horizontal partition Bolt 2 x DIN rail 4 x upright 2 x cover Cover support
Type of rail	Top hat type TH35-15
Mounting plate description	Support plate
Type of front plate	Cut-out
Number of cut-out	1 cut-out
Installed device	4 meter device Modular device
Number of 18 mm modules per row	1 x 24
9 mm pitches	48
Total number of 18 mm modules	24
Width	500 mm
Height	1200 mm
Depth	125.0 mm
Internal depth	125 mm
Net weight	7.140 kg
Material	Plastic: metering plate Plastic: cover Plastic: cover support Metal: rail Metal: upright
Colour	White (RAL 9002)

Environment

Ambient air temperature for operation	-5...40 °C
Ambient air temperature for storage	-5...40 °C
Standards	EN/IEC 61439-1

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	13.500 cm
Package 1 Width	51.000 cm
Package 1 Length	122.000 cm
Package 1 Weight	8.300 kg