

XALE3

Empty control station, Harmony XALE, plastic, light grey, 3 cut outs, for Harmony XB7



Main

| | |
|-------------------------------|--|
| Range of product | Harmony XALE |
| Product or component type | Empty control station |
| Device short name | XALE |
| Product destination | For XB7 Ø 22 mm control and signalling units |
| Number of cut-out | 3 cut-outs |
| Colour of base of enclosure | Light grey (RAL 7035) |
| Colour of cover | Light grey (RAL 7035) |
| Material | ABS (acrylonitrile butadiene-styrene) |
| Cable entry | 2 knock-outs, clamping capacity: 20 mm 6 knock-outs for ISO M20 |
| Sale per indivisible quantity | 5 |
| IP degree of protection | IP54 conforming to IEC 60529 |

Complementary

| | |
|----------------|-----------------------|
| Assembly style | For customer assembly |
| Net weight | 0.1 kg |
| Marking | CE |

Environment

| | |
|---------------------------------------|--|
| Protective treatment | TC |
| Ambient air temperature for storage | -40...70 °C |
| Ambient air temperature for operation | -25...55 °C |
| Electrical shock protection class | Class II conforming to IEC 60536 |
| IK degree of protection | IK05 conforming to EN 50102 |
| Standards | EN/IEC 62208 EN/IEC 60947-1 EN/IEC 60947-5-1 EN/IEC 60947-5-5 |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 9.500 cm |
| Package 1 Width | 7.500 cm |
| Package 1 Length | 15.000 cm |
| Package 1 Weight | 94.000 g |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 5 |
| Package 2 Height | 8.300 cm |
| Package 2 Width | 12.200 cm |
| Package 2 Length | 33.400 cm |
| Package 2 Weight | 549.000 g |
| Unit Type of Package 3 | S03 |
| Number of Units in Package 3 | 30 |

| | |
|------------------|-----------|
| Package 3 Height | 30.000 cm |
| Package 3 Width | 30.000 cm |
| Package 3 Length | 40.000 cm |
| Package 3 Weight | 3.677 kg |


Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

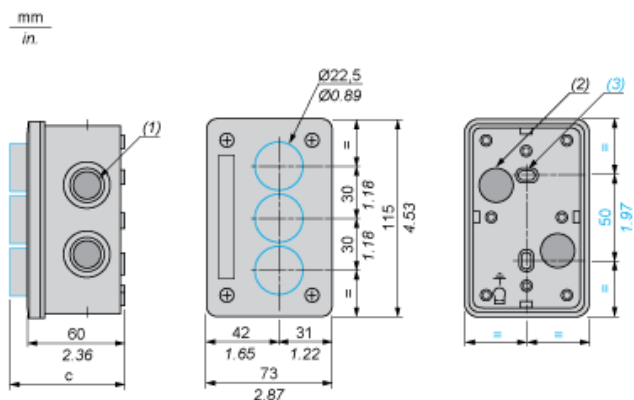

- (1) 6 ISO 20 knock-outs.
- (2) 2 knock-outs for cable entry, maximum capacity 20 mm / 0.79 in.
- (3) 2 knock-out elongated fixing holes $\varnothing 3$ mm x 5 mm / $\varnothing 0.12$ in. x 0.20 in.

| Control station XALE fitted with: | c in mm | c in in. |
|--------------------------------------|---------|----------|
| Flush pushbutton | 69 | 2.72 |
| Projecting pushbutton | 71 | 2.79 |
| Illuminated pushbutton | 74.5 | 2.93 |
| Pilot light | 71 | 2.79 |
| Emergency stop without key | 89.5 | 3.52 |
| Selector switch with standard handle | 84.5 | 3.33 |
| Key switch | 100 | 3.94 |