

## XVC4M3

Complete pre wired monolithic tower light, Harmony XVC, plastic, red orange green, 40mm, tube mounting, steady, IP23, 100...240V AC



### Main

Range of product	Harmony XVC4
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Without
Mounting diameter	40 mm
Component name	XVC
Device short name	XVC
Light source	LED steady red LED steady orange LED steady green
Supply circuit type	AC

### Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover SGP (chromium-plated): support tube
Mounting location	On support tube, 17 mm
Product mounting	On support tube, 17 mm
[Us] rated supply voltage	100...240 V
[Us] rated supply voltage	100...240 V
Cable cross section	0.83 Mm <sup>2</sup> 0.33 mm <sup>2</sup>
AWG gauge	AWG 22 AWG 18
Cable length	450 mm
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	60 mA
Net weight	0.78 kg
Height	637.2 mm

### Environment

Standards	IEC 60947-1 IEC 60947-5-1
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Electrical shock protection class	Class I conforming to IEC 61140
Overvoltage category	Class I conforming to IEC 61140
IP degree of protection	IP23 vertical surface installation conforming to IEC 60529

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.000 cm
Package 1 Width	7.000 cm
Package 1 Length	75.000 cm
Package 1 Weight	815.900 g
Unit Type of Package 2	P06
Number of Units in Package 2	10
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	17.608 kg

## Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


## Contractual warranty

Warranty	18 months
----------	-----------

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

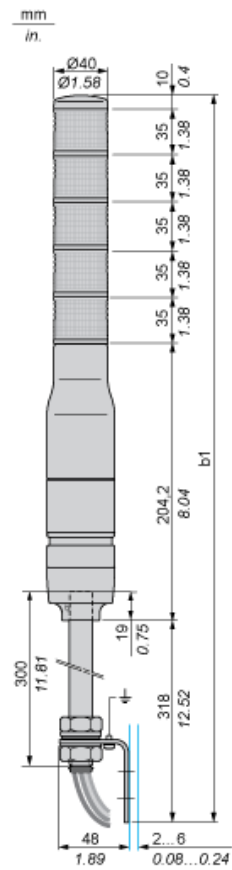

No. of illuminated units	b1 Without buzzer (mm)	b1 Without buzzer (in.)
1 stage	567.20	22.33
2 stages	602.20	23.71
3 stages	637.20	25.09
4 stages	672.20	26.46
5 stages	707.20	27.84

---

Pre-assembled and Pre-wired Tower Light

---

Support Tube Mounting

