

Main

Range of product	Canalis
Product name	KS
Offer type	Complementary
Product or component type	Cross
Busbar description	Standard
Bar material	Aluminium
Device application	Change direction
[Ie] rated operational current	630 A at 35 °C
Direction change type	Edgewise to perpendicular - neutral to up
Colour	White (RAL 9001)

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90 °
Busbar trunking polarity	3L + N + PE
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Width	113 mm
Height	146 mm
Length	290 Mm for side A 290 Mm for side B 290 Mm for side C 290 mm for side D
Net weight	11 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Standards	IEC 60439-2 IEC 61439-6

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	11 kg
Package 1 Height	27.35 cm
Package 1 width	58.1 cm
Package 1 Length	58.1 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

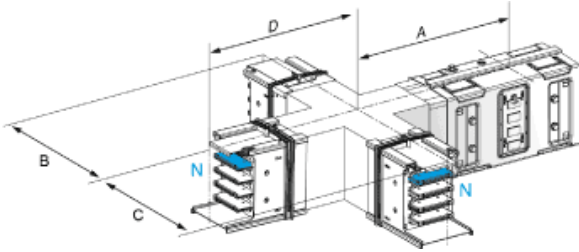

Dimensions KSA630DXC40

A (mm)	290
B (mm)	290
C (mm)	290
D (mm)	290
Fire barrier	No
Fire barrier position	-