

# XMLR100M2P06

Electronic pressure sensors, Pressure sensors  
XM, XMLR 100 bar, 1/4" 18 NPT, 24 VDC,  
2xPNP, M12



## Main

|                                         |                                                                                                                  |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Range of product                        | OsiSense XM                                                                                                      |
| Product or component type               | Electronic pressure sensors                                                                                      |
| Pressure sensor type                    | Pressure transmitter                                                                                             |
| Pressure switch type of operation       | Pressure switch with 2 switching outputs                                                                         |
| Device short name                       | XMLR                                                                                                             |
| Pressure rating                         | 9997.40 KPa<br>100 bar                                                                                           |
| Maximum permissible accidental pressure | 30 MPa<br>29992.19 KPa<br>300 bar                                                                                |
| Destruction pressure                    | 59984.39 KPa<br>600 Bar<br>60 MPa                                                                                |
| Controlled fluid                        | Fresh water (0...80 °C)<br>Air (-20...80 °C)<br>Hydraulic oil (-20...80 °C)<br>Refrigeration fluid (-20...80 °C) |
| Fluid connection type                   | 1/4" - 18 NPT (female)                                                                                           |
| [Us] rated supply voltage               | 24 V DC SELV (voltage limits: 17...33 V)                                                                         |

## Complementary

|                                                         |                                                                                               |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Current consumption                                     | <= 50 mA                                                                                      |
| Electrical connection                                   | Male connector M12, 4 pins                                                                    |
| Type of output signal                                   | Discrete                                                                                      |
| Discrete output type                                    | Solid state PNP, 2 NO/NC programmable                                                         |
| Maximum switching current                               | 250 mA                                                                                        |
| Contacts type and composition                           | 2 NO/NC programmable                                                                          |
| Scale type                                              | Fixed differential                                                                            |
| Maximum voltage drop                                    | 2 V                                                                                           |
| Adjustable range of switching point on rising pressure  | 799.79...9997.40 KPa<br>0.8...10 MPa<br>8...100 bar                                           |
| Adjustable range of switching point on falling pressure | 0.5...9.7 MPa<br>499.87...9700.92 KPa<br>5...97 bar                                           |
| Minimum differential travel                             | 0.3 MPa<br>3 Bar<br>299.92 kPa                                                                |
| Materials in contact with fluid                         | 316L stainless steel                                                                          |
| Front material                                          | Polyester                                                                                     |
| Housing material                                        | Polyacrylamide<br>316L stainless steel                                                        |
| Operating position                                      | Any position, but disposals can falsified the measurement in case of upside down mounting     |
| Protection type                                         | Overload protection<br>Reverse polarity<br>Overvoltage protection<br>Short-circuit protection |
| Response time on output                                 | <= 5 ms for discrete output                                                                   |

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switching output time delay              | 0...50 s in steps of 1 second                                                                                                                                                                                                                                                                                                                                                                                                               |
| Display type                             | 4 digits 7 segments                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Local signalling                         | 2 LEDs (yellow) for light ON when switch is actuated                                                                                                                                                                                                                                                                                                                                                                                        |
| Display response time type               | Fast 50 ms<br>Normal 200 ms<br>Slow 600 ms                                                                                                                                                                                                                                                                                                                                                                                                  |
| Maximum delay first up                   | 300 ms                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Overall accuracy                         | <= 1 % of the measuring range                                                                                                                                                                                                                                                                                                                                                                                                               |
| Measurement accuracy on switching output | <= 0.6 % of the measuring range                                                                                                                                                                                                                                                                                                                                                                                                             |
| Repeat accuracy                          | <= 0.2 % of the measuring range                                                                                                                                                                                                                                                                                                                                                                                                             |
| Drift of the sensitivity                 | +/- 0.03 % of measuring range/°C                                                                                                                                                                                                                                                                                                                                                                                                            |
| Drift of the zero point                  | +/- 0.1 % of measuring range/°C                                                                                                                                                                                                                                                                                                                                                                                                             |
| Display accuracy                         | <= 1 % of the measuring range                                                                                                                                                                                                                                                                                                                                                                                                               |
| Mechanical durability                    | 10000000 cycles                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Depth                                    | 42 mm                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Height                                   | 88 mm                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Width                                    | 41 mm                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Net weight                               | 0.186 kg                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| [Uimp] rated impulse withstand voltage   | 0.5 kV DC                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Electromagnetic compatibility            | Susceptibility to electromagnetic fields: 10 V/m 80...2000 MHz conforming to EN/IEC 61000-4-3<br>Immunity to conducted RF disturbances: 10 V 0.15...80 MHz conforming to EN/IEC 61000-4-6<br>Surge immunity test: 1 kV conforming to EN/IEC 61000-4-5<br>Electrical fast transient/burst immunity test: 2 kV conforming to EN/IEC 61000-4-4<br>Electrostatic discharge immunity test: 8 kV air, 4 kV contact conforming to EN/IEC 61000-4-2 |

## Environment

|                                       |                                                                    |
|---------------------------------------|--------------------------------------------------------------------|
| Marking                               | CE                                                                 |
| Product certifications                | CULus<br>EAC                                                       |
| Standards                             | EN/IEC 61326-2-3<br>UL 61010-1                                     |
| Ambient air temperature for operation | -20...80 °C                                                        |
| Ambient air temperature for storage   | -40...80 °C                                                        |
| IP degree of protection               | IP65 conforming to EN/IEC 60529<br>IP67 conforming to EN/IEC 60529 |
| Vibration resistance                  | 20 gn (f= 10...2000 Hz) conforming to EN/IEC 60068-2-6             |
| Shock resistance                      | 50 gn conforming to EN/IEC 60068-2-27                              |


## Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Number of Units in Package 1 | 1       |
| Package 1 Weight             | 181 g   |
| Package 1 Height             | 6.5 cm  |
| Package 1 width              | 7.5 cm  |
| Package 1 Length             | 12.7 cm |

## Offer Sustainability

|                            |                                                                                                                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REACH Regulation           |  <a href="#">REACH Declaration</a>                                                                |
| REACH free of SVHC         | Yes                                                                                                                                                                                  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                                                                                                                  |
| RoHS exemption information |  <a href="#">Yes</a>                                                                              |

## Dimensions

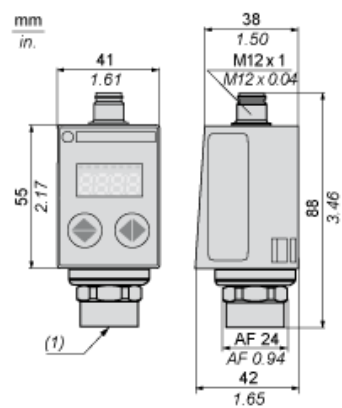


---

Connections and Schema


---

Connector Wiring



### Switching Output Description. Hysteresis Mode


The hysteresis switching mode is typically used for the “pumping and/or emptying applications”.

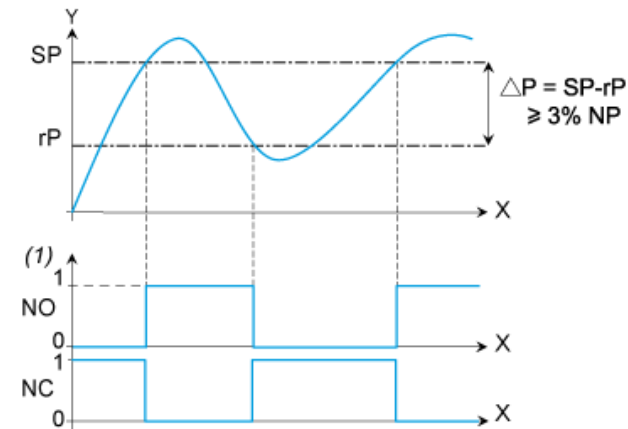

X : Time  
Y : Pressure  
(1) Output  
NP : Nominal Pressure  
SP : Set point (adjustable from 8 % to 100 % NP)  
rP : Reset point (adjustable from 5 % to 97 % NP)

### Switching Output Description. Window Mode


The window switching mode is typically used for the “pressure regulation applications”

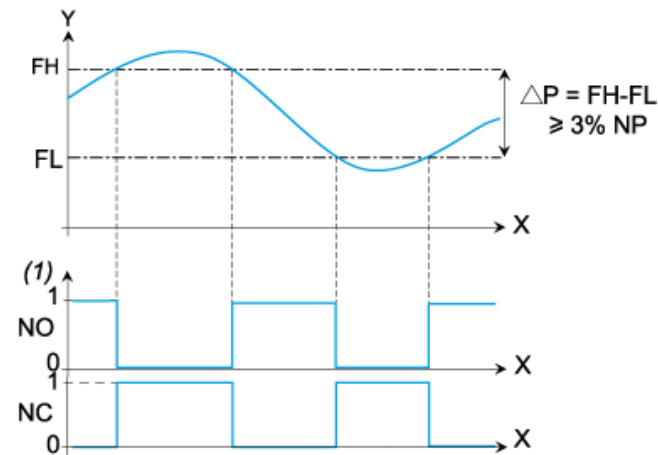

X : Time  
Y : Pressure  
(1) Output  
NP : Nominal pressure  
FH : High switching point (adjustable from 8 % to 100 % NP)  
FL : Low switching point (adjustable from 5 % to 97 % NP)

### Switching Output Description. Time Delay

The Time Delay is typically used to filter out the fast pressure transients.  
The output only switches after a time “dS” and “dr” adjustable from 0 to 50 seconds.

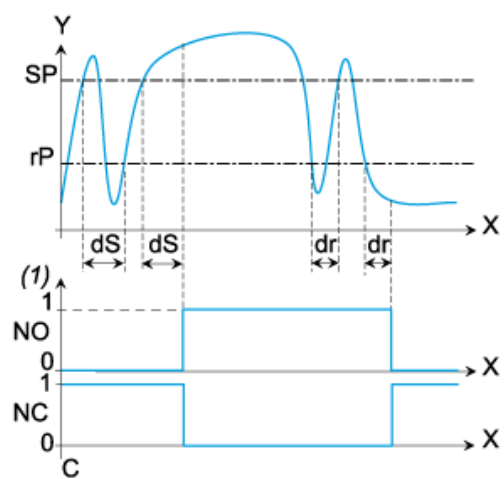

X : Time  
 Y : Pressure  
 (I) : Output  
 SP : Set point  
 rP : Reset point  
 dS : Time delay on the set point  
 dr : Time delay on the reset point