


Product data sheet

Characteristics

KZ18434

Legend for cam switch, Harmony K, use Ø 22mm hole mounting heads, 45X45mm, metallic color, marked HAND - 0 - AUTO, 45°

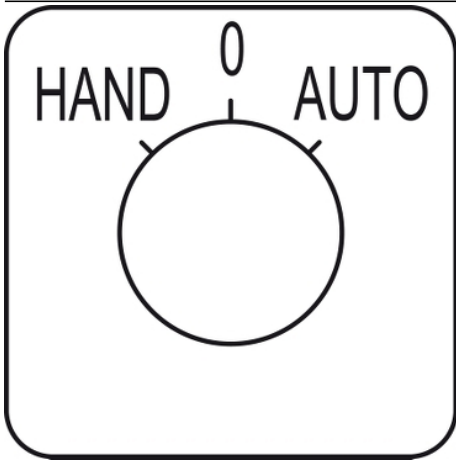

Main

| | |
|---------------------------------------|---|
| Accessory / separate part destination | Ø 22 mm hole mounting head with plastic bezel |
| Range of product | Harmony Series K |
| Accessory / separate part category | Marking accessory |
| Accessory / separate part type | Legend |
| Product or component type | Marked legend |
| Marking | HAND-O-AUTO, switching positions: 315 to 45° (each 45°) black metallic background |
| Label dimensions | 45 x 45 mm |
| Quantity per set | Set of 1 |

Complementary

| | |
|------------|----------|
| Net weight | 0.003 kg |
|------------|----------|

Packing Units

| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 0.700 cm |
| Package 1 Width | 6.300 cm |
| Package 1 Length | 8.100 cm |
| Package 1 Weight | 2.000 g |

Offer Sustainability

| | |
|----------------------------|--|
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.