

BCH2MB0133CA5C

servo motor BCH, Lexium 28, 40mm, 100W, 0.075kg.cm², with oil seal, with key, leads connection



Main

Range compatibility	Lexium 28
Device short name	BCH2
Product or component type	Servo motor

Complementary

Maximum mechanical speed	5000 rpm
[Us] rated supply voltage	220 V 110 V
Network number of phases	Single phase Three phase
Continuous stall current	0.81 A
Continuous stall torque	0.32 N.M for LXM26D at 0.9 A, 220 V, single phase 0.32 N.M for LXM26D at 0.9 A, 220 V, three phase 0.32 N.M for LXM28... at 0.9 A, 220 V, single phase 0.32 N.M for LXM28... at 0.9 A, 220 V, three phase 0.32 N.m for LXM28... at 1.8 A, 110 V, single phase
Continuous power	100 W
Peak stall torque	0.96 N.M for LXM26D at 0.9 A, 220 V, single phase 0.96 N.M for LXM26D at 0.9 A, 220 V, three phase 0.96 N.M for LXM28... at 0.9 A, 220 V, single phase 0.96 N.M for LXM28... at 0.9 A, 220 V, three phase 0.96 N.m for LXM28... at 1.8 A, 110 V, single phase
Nominal output power	100 W for LXM26D at 0.9 A, 220 V, single phase 100 W for LXM26D at 0.9 A, 220 V, three phase 100 W for LXM28... at 0.9 A, 220 V, single phase 100 W for LXM28... at 0.9 A, 220 V, three phase 100 W for LXM28... at 1.8 A, 110 V, single phase
Nominal torque	0.32 N.M for LXM26D at 0.9 A, 220 V, single phase 0.32 N.M for LXM26D at 0.9 A, 220 V, three phase 0.32 N.M for LXM28... at 0.9 A, 220 V, single phase 0.32 N.M for LXM28... at 0.9 A, 220 V, three phase 0.32 N.m for LXM28... at 1.8 A, 110 V, single phase
Nominal speed	3000 rpm for LXM26D at 0.9 A, 220 V, single phase 3000 rpm for LXM26D at 0.9 A, 220 V, three phase 3000 rpm for LXM28... at 0.9 A, 220 V, single phase 3000 rpm for LXM28... at 0.9 A, 220 V, three phase 3000 rpm for LXM28... at 1.8 A, 110 V, single phase
Maximum current Irms	2.65 A for LXM28... at 0.1 kW, 220 V 2.65 A for LXM28... at 0.1 kW, 110 V
Maximum permanent current	0.89 A
Product compatibility	LXM26D servo drive motor at 0.1 kW, 220 V, single phase LXM26D servo drive motor at 0.1 kW, 220 V, three phase LXM28... servo drive motor at 0.1 kW, 220 V, single phase LXM28... servo drive motor at 0.1 kW, 220 V, three phase LXM28... servo drive motor at 0.1 kW, 110 V, single phase

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Shaft end	Keyed
Shaft diameter	8 mm
Shaft length	25 mm
Key width	3 mm
Feedback type	20 bits single turn absolute encoder
Holding brake	Without
Mounting support	Asian standard flange
Motor flange size	40 mm
Electrical connection	Free lead
Torque constant	0.4 N.m/A at 20 °C
Back emf constant	24 V/krpm at 20 °C
Rotor inertia	0.075 kg.cm ²
Stator resistance	23.4 Ohm at 20 °C
Stator inductance	20.6 mH at 20 °C
Stator electrical time constant	0.88 ms at 20 °C
Maximum radial force Fr	85 N at 3000 rpm
Maximum axial force Fa	40 N
Brake pull-in power	4.35 W
Type of cooling	Natural convection
Length	100 mm
Number of motor stacks	2
Centring collar diameter	30 mm
Centring collar depth	3 mm
Number of mounting holes	4
Mounting holes diameter	4.5 mm
Circle diameter of the mounting holes	46 mm
Distance shaft shoulder-flange	3 mm
Net weight	0.56 kg

Environment

IP degree of protection	IP50 IM V3 IP65 IM B5, IM V1
Ambient air temperature for operation	-20...40 °C

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.295 cm
Package 1 Width	13.14 cm
Package 1 Length	24.324 cm
Package 1 Weight	86.5 g
Unit Type of Package 2	S01
Number of Units in Package 2	60
Package 2 Height	15 cm
Package 2 Width	15 cm
Package 2 Length	40 cm
Package 2 Weight	51.06 kg
Unit Type of Package 3	S06
Number of Units in Package 3	60
Package 3 Height	73.5 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	5200 g

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes

Dimensions


Dimensions of Motor

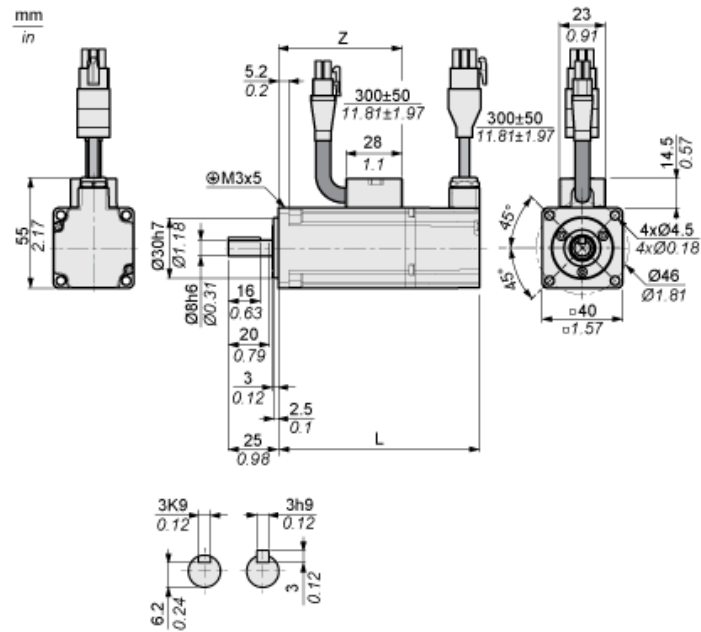

	mm	in.
L (without holding brake)	100	3.94
L (with holding brake)	130	5.12
Z	61.5	2.42

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage


Servo Motor without shaft sealing ring and LXM28AU01●●● Servo Drive

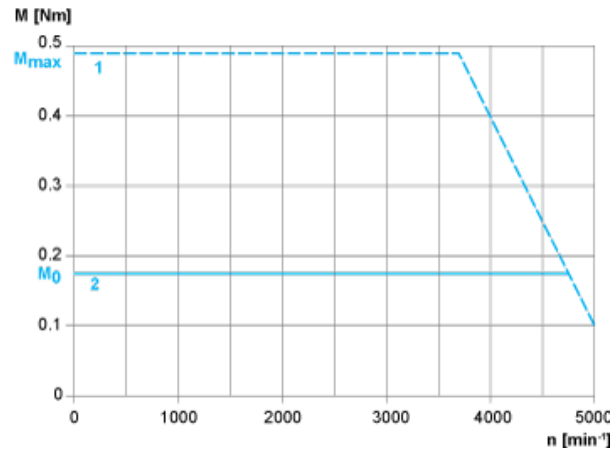

- 1 : Peak torque
- 2 : Continuous torque

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

Servo Motor with shaft sealing ring and LXM28AU01●●● Servo Drive

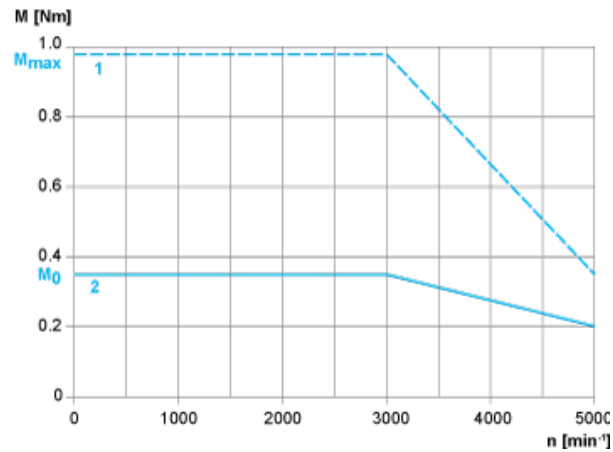

- 1 : Peak torque
- 2 : Continuous torque