

# XMLA500N2C11

Electromechanical pressure sensor, Pressure sensors XM, switch XMLA 500 bar, fixed scale 1 threshold, 1 C/O



## Main

|   |  |
|---|--|
| Range of product  | OsiSense XM  |
| Product or component type                               | Electromechanical pressure sensor  |
| Pressure sensor type                                    | Electromechanical pressure sensor  |
| Device short name                                       | XMLA   |
| Pressure rating   | 500 bar  |
| Controlled fluid  | Air (0...160 °C)<br>Corrosive fluid (0...160 °C)   |
| Fluid connection type                                   | G 1/4 (female) conforming to ISO 228   |
| Electrical connection                                   | 1 male connector EN 175301-803-A (ex DIN43650), 4 pins   |
| Contacts type and composition                           | 1 C/O  |
| Product specific application                            | -  |
| Pressure switch type of operation                       | Detection of 1 single threshold  |
| Electrical circuit type                                 | Control circuit  |
| Scale type  | Fixed differential   |
| Local display   | With   |
| Adjustable range of switching point on rising pressure  | 30...500 bar   |
| Adjustable range of switching point on falling pressure | 10...455 bar   |
| Maximum permissible accidental pressure                 | 1125 bar   |
| Destruction pressure                                    | 2250 bar   |
| Pressure actuator                                       | Piston   |
| Materials in contact with fluid                         | 316L stainless steel<br>FPM, FKM<br>PTFE   |
| Enclosure material                                      | Zinc alloy   |
| [In] rated current                                      | 3 A, B300, AC-15 (Ue = 120 V) conforming to EN/IEC 60947-5-1<br>1.5 A, B300, AC-15 (Ue = 240 V) conforming to EN/IEC 60947-5-1<br>0.1 A, R300, DC-13 (Ue = 250 V) conforming to EN/IEC 60947-5-1 |

## Complementary

|  |   |
|--|---|
| Natural differential at low setting      | 20 bar (+/- 6 bar)  |
| Natural differential at high setting     | 45 bar (+/- 10 bar)   |
| Maximum permissible pressure - per cycle | 625 bar   |
| Terminal block type                      | 4 terminals   |
| Maximum operating rate                   | 60 cyc/mn   |
| Repeat accuracy                          | 2 %   |
| [Ui] rated insulation voltage            | 300 V conforming to UL 508<br>500 V conforming to EN/IEC 60947-1<br>300 V conforming to CSA C22.2 No 14 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|  |  |
|--|--|
| [Uimp] rated impulse withstand voltage | EN/IEC 60947-1 6 kV  |
| Auxiliary contacts operation           | Snap action  |
| Contacts material                      | Silver contacts  |
| Maximum resistance across terminals    | 25 MOhm conforming to IEC 255-7 category 3<br>25 mOhm conforming to NF C 93-050 method A |
| Short-circuit protection               | 10 A cartridge fuse, type gG (gl)  |
| Mechanical durability                  | 3000000 cycles   |
| Setting                                | External   |
| Height                                 | 113 mm   |
| Depth                                  | 75 mm  |
| Width                                  | 35 mm  |
| Net weight                             | 0.78 kg  |

## Environment

|                                       |  |
|---------------------------------------|--|
| Standards                             | CSA C22.2 No 14<br>EN/IEC 60947-5-1<br>CE<br>UL 508  |
| Product certifications                | UL<br>CSA<br>BV<br>LROS (Lloyds register of shipping)<br>CCC<br>EAC                                  |
| Protective treatment                  | TC standard version  |
| Ambient air temperature for operation | -25...70 °C  |
| Ambient air temperature for storage   | -40...70 °C  |
| Operating position                    | Any position   |
| Vibration resistance                  | 4 gn conforming to IEC 60068-2-6 (f = 30...500 Hz)   |
| Shock resistance                      | 50 gn conforming to IEC 60068-2-27   |
| Electrical shock protection class     | Class I conforming to IEC 1140<br>Class I conforming to IEC 536<br>Class I conforming to NF C 20-030 |
| IP degree of protection               | IP65 conforming to EN/IEC 60529  |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.085 kg |
| Package 1 Height | 1.250 dm |
| Package 1 width  | 0.420 dm |
| Package 1 Length | 0.820 dm |

## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes  |
| RoHS exemption information | <a href="#">Yes</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions



- (1) 1 fluid entry, tapped G1/4 (BSP female)
- (2) EN 175301-803-A connector
- Ø : 2 elongated holes Ø 5.2 x 6.7

---

Wiring Diagram

---

Terminal Model



---

Wiring Diagram


---

Vacuum Switch Connector Pin View




- (1) 11 and 13
- (2) 12
- (3) 14

Operating Curves

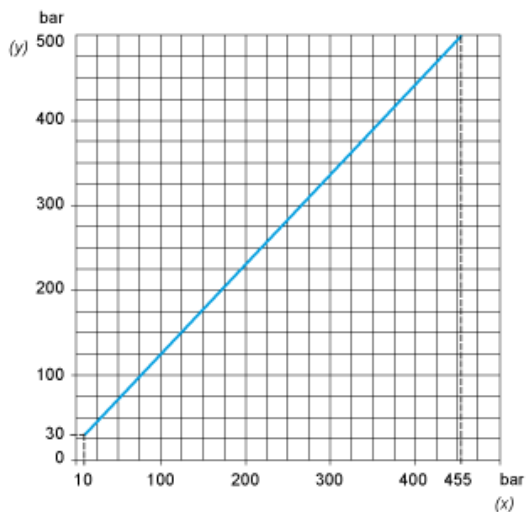

(y) Rising pressure  
(x) Falling pressure

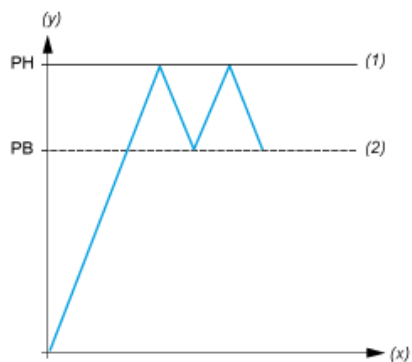

(y) Pressure  
(x) Time  
(1) Adjustable value  
(2) Non adjustable value  
PH : High point  
PB : Below point